

Sharp Cut Filter (Red)

Catalog Thickness t = 2.5 mm

Reflection Factor $P_d = 0.916$

Diagram-1

R-64

Transmittance (T) & Internal Transmittance (τ) units: (%)

λ_{nm}	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	370	380	390	400	410	420	430	440	
T																										
τ																										
λ_{nm}	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590	600	610	620	630	640	650	660	670	680	690	
T																		$8 \cdot 10^{-3}$.18	7.2	37.9	69.1	84.4	89.5	91.0	91.3
τ																		$9 \cdot 10^{-3}$.20	7.9	41.4	75.4	92.1	97.7	99.3	99.7
λ_{nm}	700	710	720	730	740	750	800	850	900	950	1,000	1,100	1,200	1,300	1,400	1,500	1,600	1,700	1,800	1,900	2,000	2,100	2,200	2,300	2,400	
T	91.5																									
τ	99.9																									

Refractive Indices

Symbol	i	h	g	F'	F	e	d	D	C'	C	r	A'	t
λ_{nm}	365.0	404.7	435.8	480.0	486.1	546.1	587.6	589.3	643.8	656.3	706.5	768.2	1,014.0
n							(1.528)		1.526	1.526	1.524	1.522	1.518

Abbe-Number

$$V_d = \frac{n_d - 1}{n_F - n_C} =$$

Color Specifications

	x	y	Y	λ_d	P_e
A	.726	.274	4.2	650	100
C	.725	.275	2.2	648	100
D ₆₅	.725	.275	2.0	648	100


Properties

Chemical		Thermal				Mechanical		Other
D _w	D _A	T _g	T _s	$\alpha_{-30/70}$	$\alpha_{100/300}$	H _k	F _A	S
1	1	555	620	94	106	520	140	2.68

Tolerances of Transmittance (T)

Transition Wavelength	Transition Interval	Average High Transmittance
$\lambda T (nm)$	$\Delta \lambda (nm)$	T _H (%)
640 ± 5	< 35	> 85

Transmittance (T)

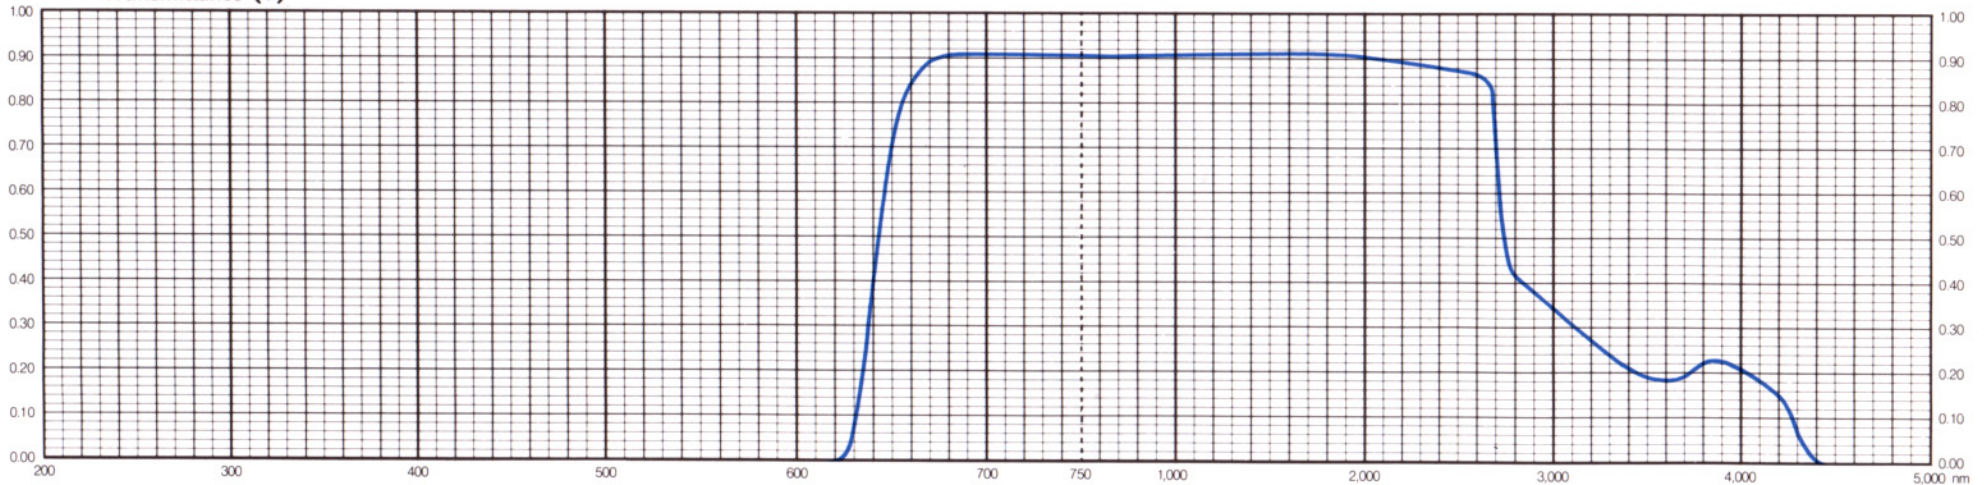

All data are mean values of various melts.