

Transmittance (T)		units: %																			
λnm	T	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	370	380	390
λnm	T	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	T	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590
λnm	T	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.4	47.3	79.0	87.1	89.2	89.8	90.1	90.2	90.2
λnm	T	600	610	620	630	640	650	660	670	680	690	700	710	720	730	740	750	760	770	780	790
λnm	T	800	810	820	830	840	850	860	870	880	890	900	910	920	930	940	950	960	970	980	990
λnm	T	1000	1010	1020	1030	1040	1050	1060	1070	1080	1090	1100	1120	1140	1160	1180	1200				
λnm	T	90.9	91.0	90.9	90.9	90.9	91.0	91.0	91.0	90.9	91.0	91.0	91.0	91.0	91.1	91.1	91.1				

Refractive Index/Absorption coefficient/Reflection coefficient

λnm	400	500	600	700	800	900	1000
n	1.552	1.539	1.531	1.527	1.524	1.522	1.521
P	0.911	0.914	0.916	0.917	0.917	0.918	0.918

Classes of Bubbles and Inclusions

Bubble Class
3

Color Specification


	x	y	Y	λ <sub>v</sub>	P <sub>s</sub>
A	0.535	0.460	81	584	97
C	0.486	0.507	73	577	98
D65	0.482	0.510	73	576	98

Properties

Chemical		Thermal				Mechanical		Others
D <sub>w</sub>	D <sub>A</sub>	T <sub>g</sub>	T <sub>s</sub>	α <sub>-30/70</sub>	α <sub>100/300</sub>	H <sub>K</sub>	F <sub>A</sub>	d
2	1	560	620	96	108	540	130	2.68


Tolerance of Transmittance (τ)

λ <sub>T</sub> (nm)	Δλ (nm)	TH (%)
520±5	<25	>85

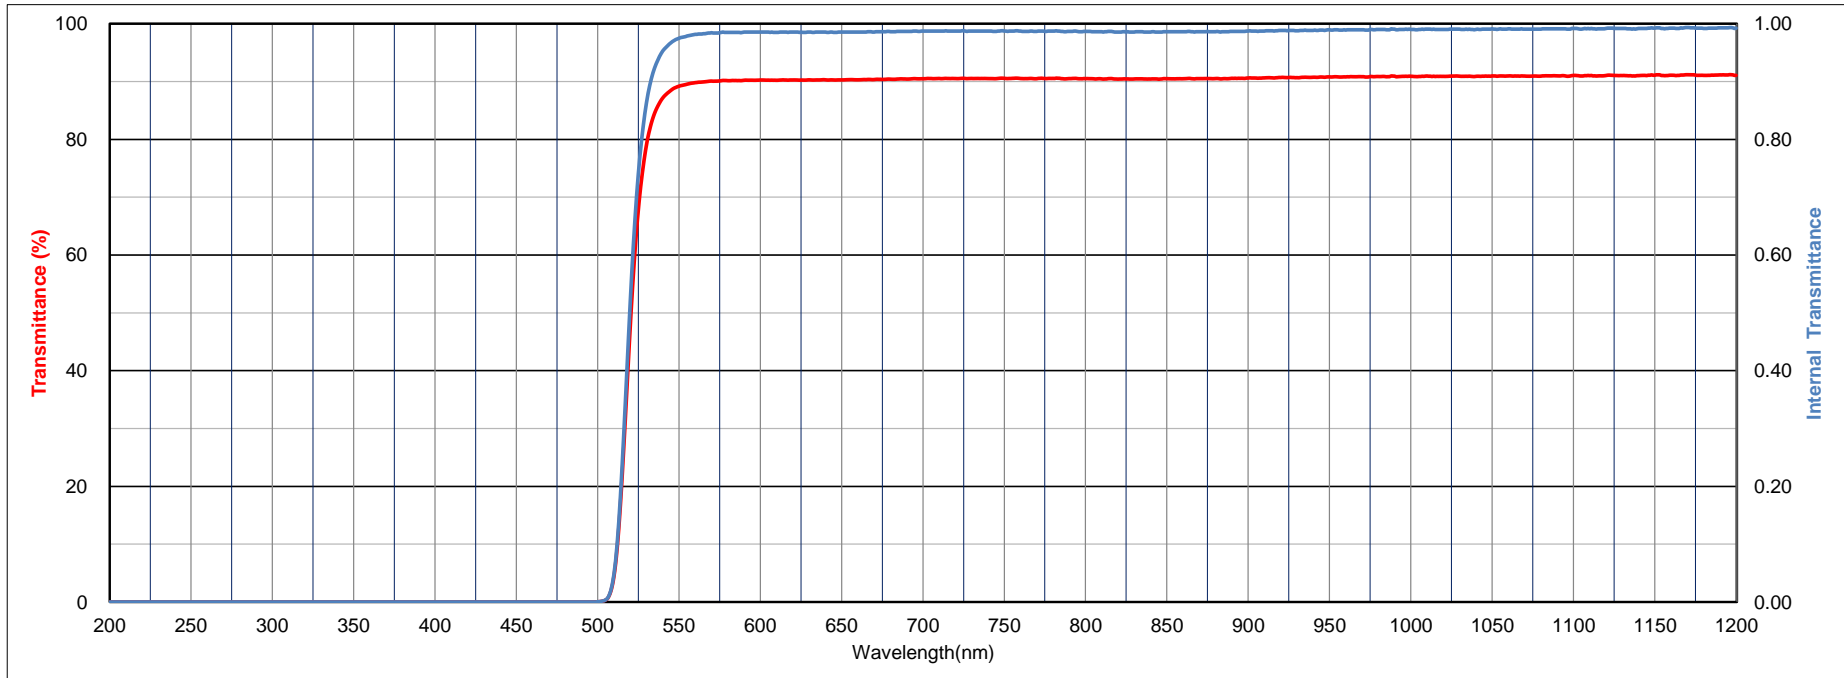

All data is mean values of various melts.

Transmittance (T)		units: %																		
λnm	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	370	380	390
τ	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590
τ	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.4	47.3	79.0	87.1	89.2	89.8	90.1	90.2	90.2	90.2
λnm	600	610	620	630	640	650	660	670	680	690	700	710	720	730	740	750	760	770	780	790
τ	90.3	90.2	90.3	90.3	90.3	90.3	90.3	90.3	90.4	90.4	90.5	90.5	90.5	90.5	90.5	90.6	90.5	90.5	90.5	90.5
λnm	800	810	820	830	840	850	860	870	880	890	900	910	920	930	940	950	960	970	980	990
τ	90.5	90.5	90.4	90.4	90.4	90.5	90.5	90.5	90.5	90.6	90.6	90.6	90.7	90.7	90.7	90.8	90.8	90.8	90.9	90.9
λnm	1000	1010	1020	1030	1040	1050	1060	1070	1080	1090	1100	1110	1120	1130	1140	1150	1160	1170	1180	1190
τ	90.9	91.0	90.9	90.9	90.9	91.0	91.0	91.0	90.9	91.0	91.0	91.0	91.0	91.0	91.0	91.1	91.1	91.2	91.1	91.1
λnm	1200	1210	1220	1230	1240	1250	1260	1270	1280	1290	1300	1310	1320	1330	1340	1350	1360	1370	1380	1390
τ	91.1	91.0	91.2	91.1	91.1	91.1	91.0	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.0	91.0	91.0	91.0	90.9	90.9
λnm	1400	1410	1420	1430	1440	1450	1460	1470	1480	1490	1500	1510	1520	1530	1540	1550	1560	1570	1580	1590
τ	90.9	90.9	91.0	91.2	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.2	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3
λnm	1600	1610	1620	1630	1640	1650	1660	1670	1680	1690	1700	1710	1720	1730	1740	1750	1760	1770	1780	1790
τ	91.3	91.3	91.3	91.2	91.2	91.2	91.2	91.1	91.1	91.1	91.0	91.0	91.0	90.9	90.9	90.8	90.8	90.8	90.8	90.7
λnm	1800	1810	1820	1830	1840	1850	1860	1870	1880	1890	1900	1910	1920	1930	1940	1950	1960	1970	1980	1990
τ	90.7	90.7	90.6	90.6	90.6	90.6	90.5	90.5	90.5	90.5	90.4	90.4	90.4	90.3	90.3	90.2	90.2	90.1	90.1	90.1
λnm	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950
τ	90.0	89.9	89.4	88.9	88.1	87.6	87.6	87.4	87.0	86.4	85.8	85.4	84.9	84.0	80.8	46.2	31.5	29.0	27.4	26.0
λnm	3000	3050	3100	3150	3200	3250	3300	3350	3400	3450	3500	3550	3600	3650	3700	3750	3800	3850	3900	3950
τ	24.6	23.0	21.2	19.5	17.9	16.5	15.3	14.1	13.1	12.3	11.7	11.3	11.5	11.6	11.8	12.6	13.9	15.4	15.9	15.6
λnm	4000	4050	4100	4150	4200	4250	4300	4350	4400	4450	4500	4550	4600	4650	4700	4750	4800	4850	4900	4950
τ	15.0	14.4	13.7	12.6	11.2	9.3	7.3	5.2	3.4	2.0	1.0	0.4	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	5000																			
τ	0.0																			

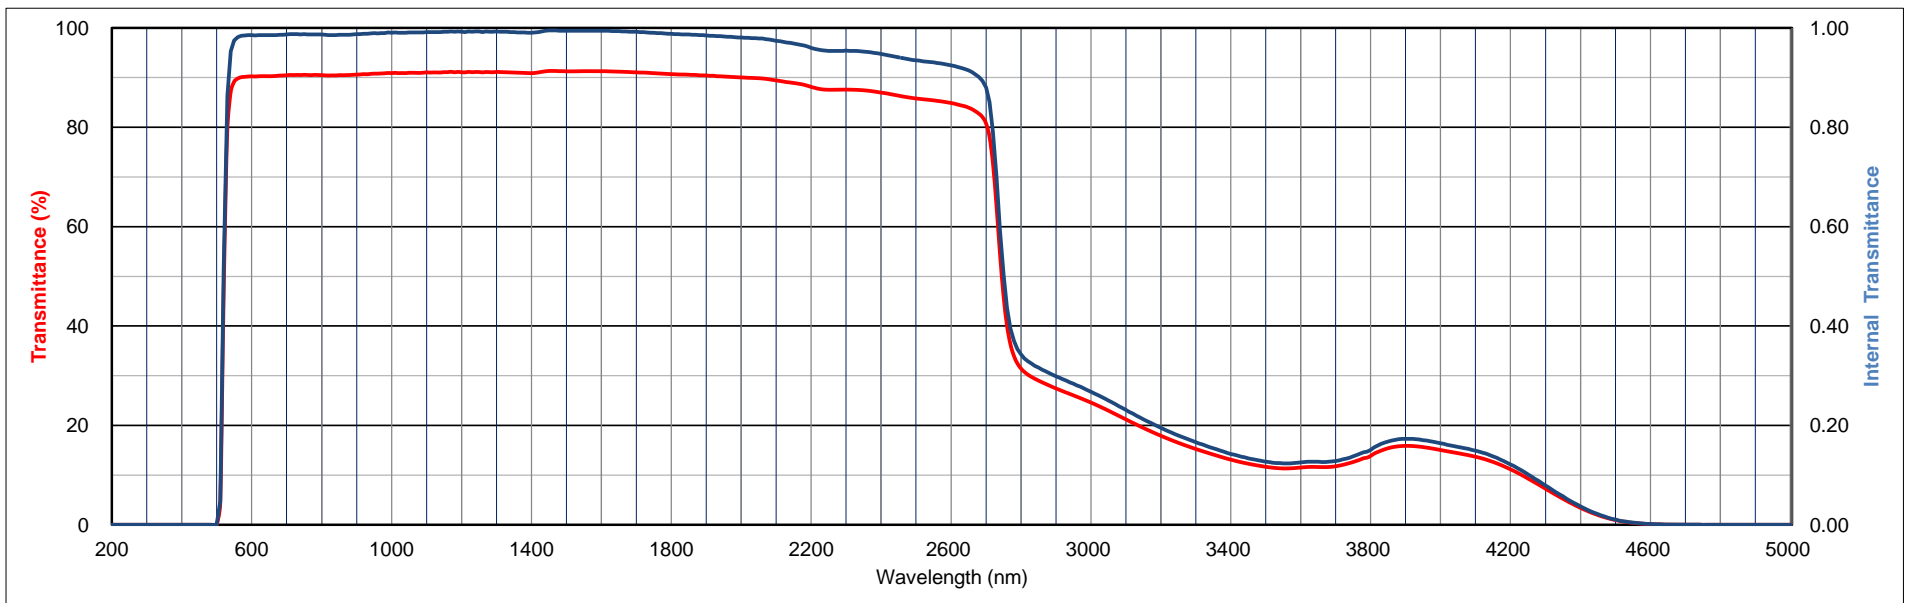

All data is mean values of various melts.

The content of this catalog is accurate as of October ,2020